

March 16, 2021

ADDENDUM TO ADVERTISED CONTRACT

PROJECT NAME: TOWN OF BRASELTON 2021 LMIG ASPHALT RESURFACING PROJECT

PROJECT NUMBER: RFB #2021LMIG

CITY: TOWN OF BRASELTON

AMENDMENT NUMBER: 1

LETTING DATE: APRIL 9, 2021

THE FOLLOWING CHANGES ARE HEREBY MADE TO THIS CONTRACT. THE BIDDER IS RESPONSIBLE FOR MAKING ANY NECESSARY CHANGES IN INK IN THE PROPOSAL. BIDDER SHALL ACKNOWLEDGE THIS AMENDMENT BY CHECKING THE APPROPRIATE SPACE ON THE AMENDMENT CERTIFICATION PAGE.

.....

QUESTIONS/CLARIFICATIONS

1. Add Bid Alternate #2 - Milling, Patching & Resurfacing of streets in the Mulberry Park Subdivision
 - a. See attached revised bid forms
 - b. See attached typical sections and location map

ALTERNATE 2 -BID SCHEDULE

BID ALTERNATE 2 - MULBERRY PARK SUBDIVISION

LINE NO.	GDOT ITEM	ITEM	QUAN TITY	UNIT	UNIT AMOUNT	AMOUNT
5	150-1000	TRAFFIC CONTROL -2021-01	LS	1		
10	402-1802	RECYCLED ASPH CONC PATCHING, INCL BITUM MATL & H-LIME (330LB/SY)	TN	664		
15	402-3102	RECYCLE ASPH CONC 19 MM SUPERPAVE, TP 2, BLEND 1, INCL BITUM MATL & H-LIME	TN	1272		
20	402-3102	RECYCLE ASPH CONC 9.5 MM SUPERPAVE, TP 2, BLEND 1, INCL BITUM MATL & H-LIME	TN	1685		
25	413-1000	BITUM TACK COAT	GL	1250		
30	432-5010	MILL ASPH CONC PVMT, 3"	SY	10734		
35	653-1704	THERMOPLASTIC SOLID TRAFFIC STRIPE, 24 IN, WHITE	LF	240		

ALTERNATE 2 BID TOTAL:

CONTRACTOR SIGNATURE: _____

CONTRACTOR SEAL: _____

DATE: _____

BID EXECUTION FORM

To: Town of Braselton
P.O. Box 306
Braselton, GA 30517

Date: _____

From: _____
(Contractor)

(Address)

I have examined the Invitation to Bid, the latest Georgia Department of Transportation Standard Specifications, Supplemental Specifications, General Conditions, Special Provisions, and Drawings for the project entitled **Town of Braselton 2021 LMIG Asphalt Resurfacing Project**. I have examined the site and the conditions affecting the work. I have also received Amendments Numbered _____ and have included their provisions in this Proposal.

I propose to furnish all services, labor, material, tools, equipment, transportation, supervision and other items necessary to complete the construction of the project in its entirety, in accordance with the Specifications and Drawings, for the unit price sum of:

BASE BID

_____ Dollars (\$ _____),

ALTERNATE 1 – HOSCHTON

_____ Dollars (\$ _____),

ALTERNATE 2 – MULBERRY PARK SUDIVISION

_____ Dollars (\$ _____),

In submitting this Proposal, I also agree:

1. Not to withdraw or modify this Proposal for a period of sixty (60) days following the opening of bids.
2. If I am notified in writing of acceptance of this Proposal within sixty (60) days after the time set for the opening of the bids, I agree to execute a written Contract for the compensation herein stated within ten (10) days, in accordance with the Instructions for Bidders, and at the same time, furnish and deliver to the Town of Braselton a Performance Bond in the amount of one hundred percent (100%) of the Contract sum and a Payment Bond in the amount of one hundred percent (100%) of the Contract sum.
3. To start work within ten (10) days of the Notice to Proceed with an adequate force and equipment to complete all work required by the Contract within **Thirty (30)** consecutive calendar days.
4. That this Proposal is made subject to all the terms and conditions on the Invitation for Bids, Instructions for Bidders, the latest Georgia Department of Transportation Standard Specifications, Supplemental Specifications, General Conditions, Special Provisions, and Drawings, and this Proposal is made in good faith, without collusion or connection with any other person bidding the same work.
5. I have attached a Bid Bond in an amount not less than five percent (5%) of my total bid price from _____
_____ or a cashier's check.
(Surety Company)

This Proposal is submitted in the name of:


Contractor: _____ Phone: _____

Address: _____

By: _____

Secretary: _____


Witness: _____

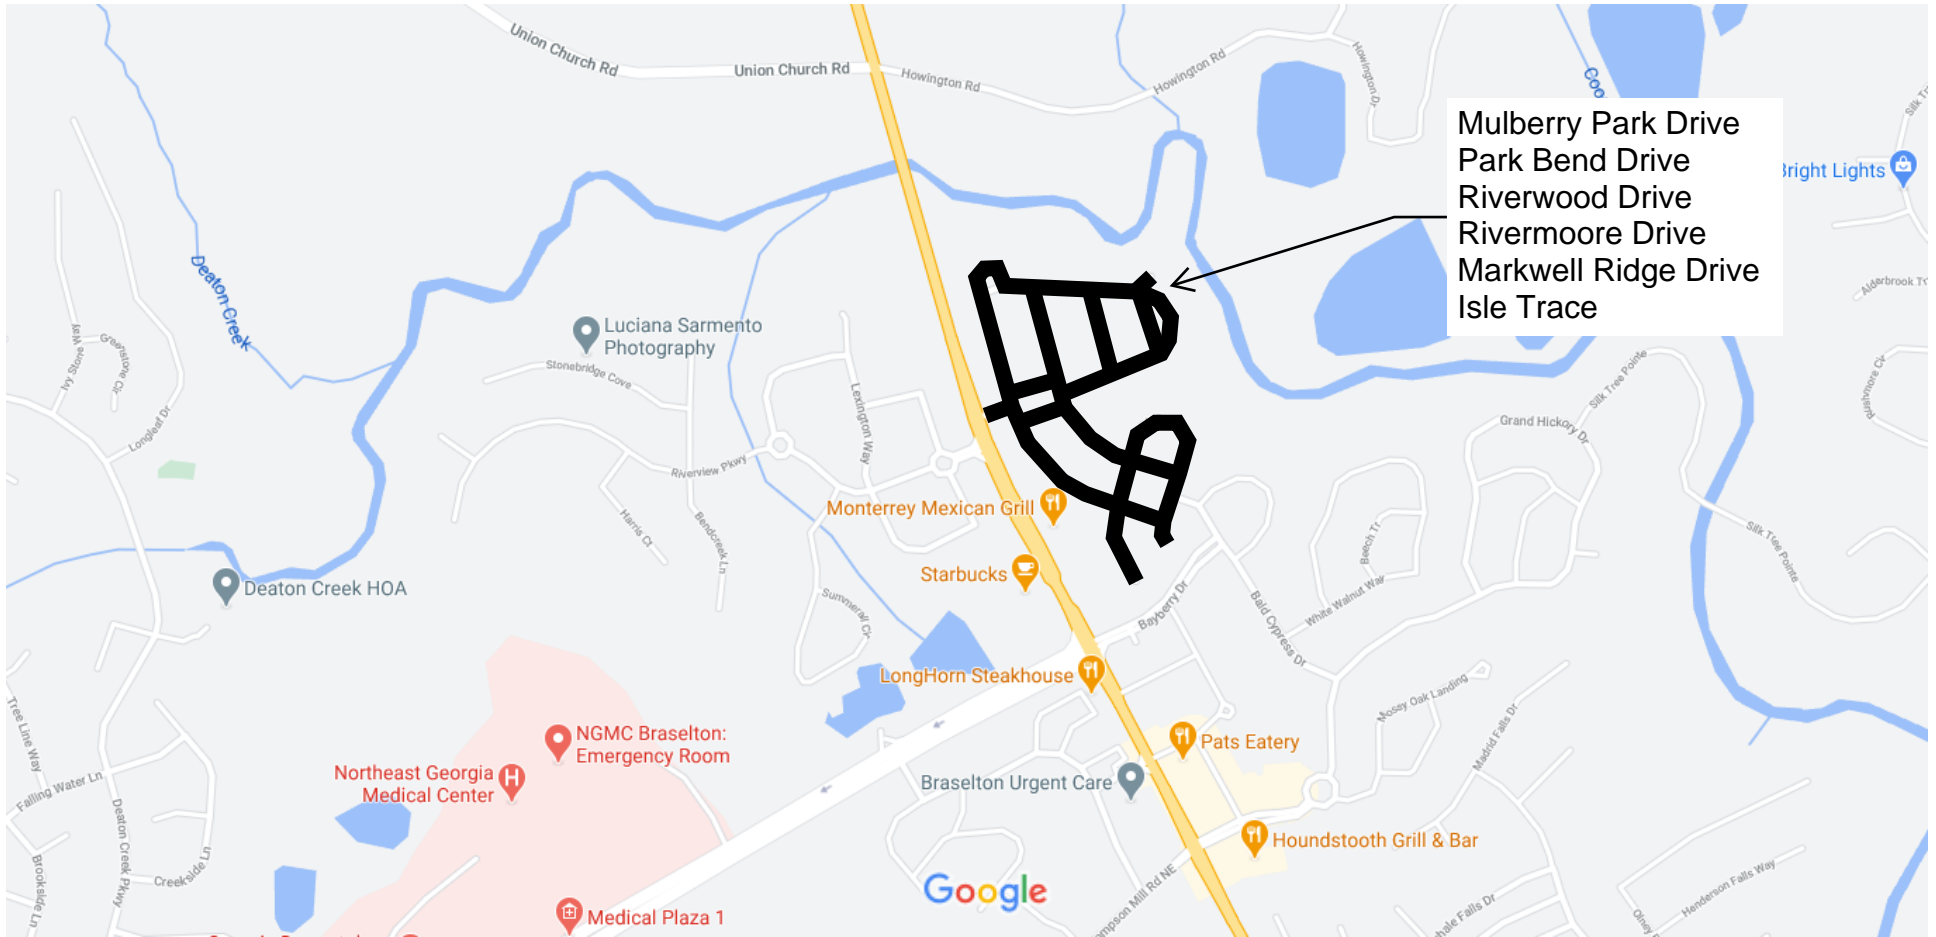

Mulberry Park Drive
Park Bend Drive
Riverwood Drive
Rivermoore Drive
Markwell Ridge Drive
Isle Trace

Summary Report Milling, Patching & Topping

Road Name	Length	Width	SY	Deep Patching, 3" Depth w/ 19 MM MIX(TN)	Asph Conc Milling 3"	Profile Mill Asph Conc Pvmt, Variable Depth (SY)	220 LB/SY 19 MM SP (TN)	135 LB/SY 9.5 MM SP (TN)
Mulberry Park Drive	1900	24	5067		5067		557	342
Park Bend Drive	2040	24	5440		5440		598	367
Riverwood Drive	1400	24	3733	185		1867		252
Rivermoore Drive	2325	24	6200	307		3100		419
Markwell Ridge Drive	375	24	1000	50		500		68
Isle Trace	475	24	1267	63		633		86
As Directed				60	227	114	116	152
Totals	8515		22707	664	10734	6214	1272	1685

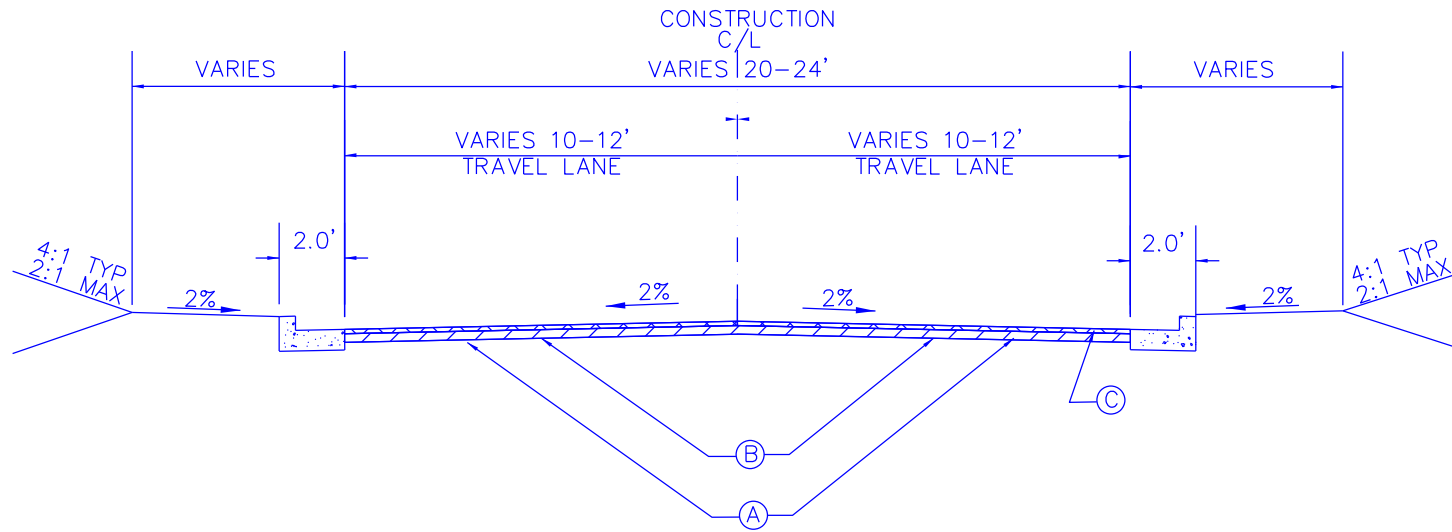

TYPICAL SECTION

Riverwood Drive
 Rivermoore Drive
 Markwell Ridge Drive
 Isle Trace

- A. MILL ASPH CONC, 3" DEPTH
- B. 220 LB/SY RECYCLED ASPHALT CONCRETE 19 MM SUPERPAVE OVERLAY
- C. 135 LB/SY RECYCLED ASPHALT CONCRETE 9.5 MM SUPERPAVE OVERLAY

REVISIONS	
NO.	DATE

TYPICAL SECTIONS FOR:
 2021 LMIG
 TOWN OF BRASELTON